

Ecoply® Bracing Specification – EP1

April 2009

Single sided structural plywood brace

Specification No.	Minimum Wall Length	Lining Requirements	BUs/m Wind	BUs/m Earthquake
EP1	0.6 m	7mm Ecoply® or 12mm Shadowclad® one side	130	130

Framing

Wall framing must comply with:

- NZBC B1 - Structure: AS1 Clause 3 Timber (NZS3604)
- NZBC B2 - Durability: AS1 Clause 3.2 Timber (NZS3602)

Framing dimensions and height are as determined by the NZS3604 stud and top plate tables for load bearing and non load bearing walls. Kiln dried verified structural grade timber must be used. Machine stress graded timber, such as Laserframe®, is recommended.

Bottom Plate Fixing

Use GIB Handibrac® hold-down connections at each end of the bracing element. Refer to installation instructions supplied with the connectors for correct installation instructions and bolt types to be used for either concrete or timber floors. Within the length of the bracing element, bottom plates are fixed in accordance with the requirements of NZS 3604:1999.

Lining

One layer 7mm Ecoply structural ply wood or 12mm Shadowclad exterior wall cladding fixed directly to framing or over cavity battens. If part sheets are used, ensure nailing at required centres is carried out around the perimeter of each sheet or part sheet. A 2-3mm expansion gap should be left between sheets.

Fastening the Ecoply®

Fasteners

Fasten with 50 x 2.8 mm galvanised or stainless steel flat head nails for direct fix or 60 x 2.8mm over cavity battens. Place fasteners no less than 7 mm from sheet edges.

Where fasteners are in contact with CCA treated timber or plywood, or the bracing panel forms part of an exterior envelope, fasteners must be stainless steel. Stainless steel fasteners must be annular grooved.


Fastening Centres

Fasteners are placed at 150 mm centres around the perimeter of each sheet and 300 mm centres to intermediate studs.

Fastening to Cavity Battens

The brace element may be fixed over cavity battens.

The cavity battens must be a minimum of 40 x 20mm nailed staggered formation at 150mm centres to studs around the perimeter of the brace element, and nailed to the intermediate studs within the element at 300mm centres, with 50mm x 2.8mm flat head galvanised or annular grooved stainless steel nails.

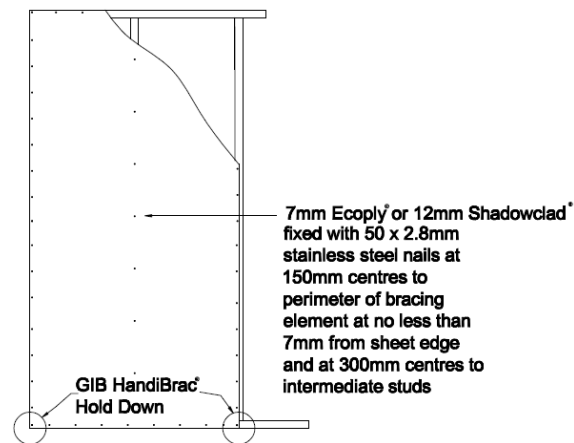

Ecoply® Bracing Systems are designed to meet the requirements of the NZBC and have been tested and analysed using the P21 method referenced in NZS3604:1999 listed as an acceptable solution B1/AS1 Structure. Testing was carried out using Ecoply, Shadowclad and Laserframe MSG8 timber framing manufactured by Carter Holt Harvey Limited trading as Carter Holt Harvey Woodproducts New Zealand, and GIB® products manufactured by Winstone Wallboards Ltd. **Substituting materials may compromise performance of the system.** GIB® and GIB Handibrac® are registered trade marks of Fletcher Building Holdings Ltd.